Machine Vision Enclosures and Mounting Solutions



22C Series

The 22C Series enclosure is designed to house up to 30 x 30mm diameter inline cameras, lasers, or sensors. The enclosure provides access to the camera without the use of tools. It is compact and light enough to be mounted in robotic applications on the arm or end effector.

Product Features

- Lightweight
- Miniature
- Rugged
- · Air cooling/Air curtain
- Available in three standard barrel lengths: 106.7, 127, and 146.1mm
- Custom lengths available

Construction

- 6061 aluminum body, barrel, and base
- 18-8 fasteners
- · Hardcoat anodized finish

Environment


• Indoor NEMA 12/IP52

Accessories

- Pan & Tilt Mount
- Shutter
- KG1 viewport



Camera and Lens Size Viewing Window			
Camera Mounting	Viewport	Viewing Area	Cable Entry
Universal camera mount	Abrasion resistant optical grade acrylic	45mm Dia.	PG16 Split cable gland
Universal camera mount	Soda Lime glass	45mm Dia.	PG16 Split cable gland
Universal camera mount	Soda Lime glass	45mm Dia.	PG16 Split cable gland
Universal camera mount	Abrasion resistant optical grade acrylic	45mm Dia.	PG16 Split cable gland
Camera mounting			
Cognex Micro	Soda Lime glass	45mm Dia.	PG16 Split cable gland
Cognex Micro	Abrasion resistant optical grade acrylic	45mm Dia.	PG16 Split cable gland
	Camera Mounting Universal camera mount Universal camera mount Universal camera mount Universal camera mount Camera mount Camera mount Cognex Micro	Camera Mounting Universal camera mount Universal camera mount Universal camera mount Universal camera mount Universal camera mount Universal camera mount Camera mount Camera mount Camera mount Camera mounting Cognex Micro Viewport Abrasion resistant optical grade acrylic Abrasion resistant Optical grade acrylic Abrasion resistant Abrasion resistant	Camera MountingViewportViewing AreaUniversal camera mountAbrasion resistant optical grade acrylic45mm Dia.Universal camera mountSoda Lime glass45mm Dia.Universal camera mountSoda Lime glass45mm Dia.Universal camera mountAbrasion resistant optical grade acrylic45mm Dia.Camera mountingCognex MicroSoda Lime glass45mm Dia.Cognex MicroAbrasion resistant optical grade acrylic45mm Dia.

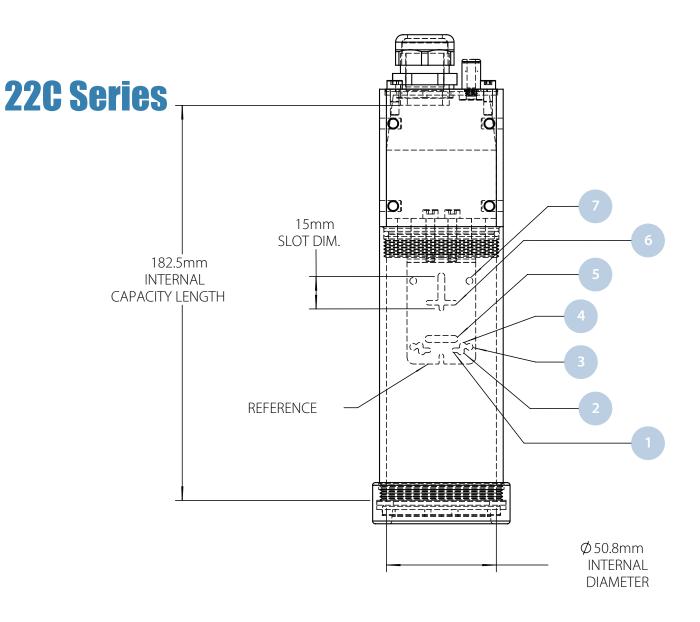

Item Number	Fastener Size, metric	Hole Spacing Across Width, mm	Distance from Reference, mm
1	M2	12	6.3
2	M3	18	5.8
3	M3	26	7.9
4	M3	20	8.4
5	M3	12	11.6
6	M2	12	28.3
7	M3	26	38.4

apg**vision**

4055 Alpha Drive • Allison Park, PA 15101 www.apgvision.com